


CODE	HEIGHT
086	8.6mm
092	9.2mm
096	9.6mm
098	9.8mm
106	10.6mm
109	10.9mm
112	11.2mm
114	11.4mm
117	11.7mm
124	12.4mm
143	14.3mm
154	15.4mm
158	15.8mm
175	17.5mm
188	18.8mm

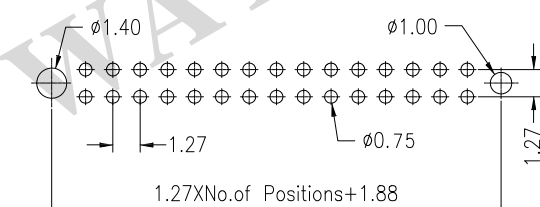

Recommended PCB Layout  
(PCB TOLERANCE ±0.1)


1. MATERIAL

- 1.1 INSULATOR: POLYESTER (UL 94V-0); STANDARD: PA6T
- 1.2 CONTACT MATERIAL: COPPER ALLOY.
- 1.3 CONTACT PLATING: Au or Sn Over Ni

2. SPECIFICATION

- 2.1 CURRENT RATING: 1.0 Amp.
- 2.2 INSULATION RESISTANCE: 800mΩ Min.
- 2.3 DIELECTRIC WITHSTANDING: 400VAC.
- 2.4 CONTACT RESISTENCE: 20mΩ Max.
- 2.5 OPERATING REMPERATURE: -40°C TO +105°C.

**BH 127 - XXX - XXX GX**

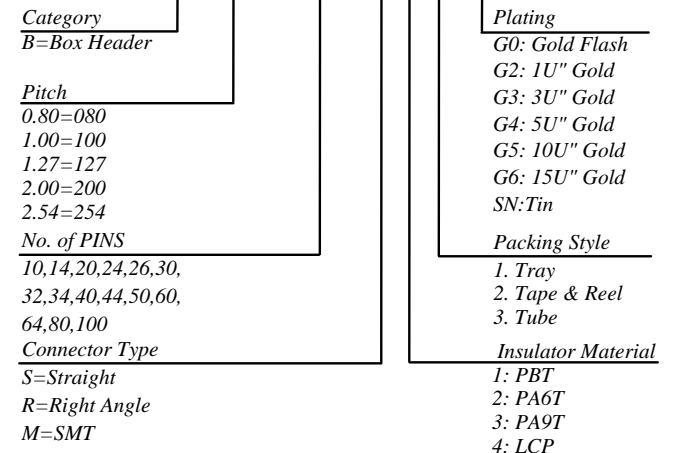

PRODUCT TITLE:		1.27mm box header, Thru-Hole Type, Selective Height	
UNLESS OTHERWISE SPECIFIED TOLERANCES	SCALE: 1/1	UNIT: mm	 BH127-2XX-SXXGX-05
	SIZE: A3	PAGE: 1 OF 1	
DECIMALS:	ANGLES:	<b>WAYCONN ELECTRONICS</b>	
X : ±0.5	X : ±6°		
X.X : ±0.3	X.X : ±3°		
X.XX : ±0.2	X.XX : ±2°		