
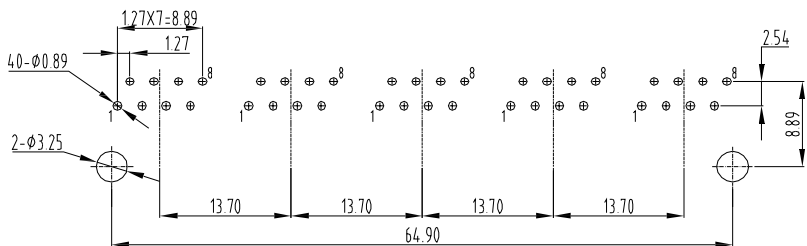
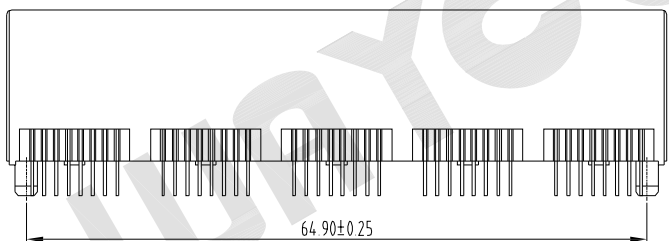


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 03/24/16'		

- Material:**
 Housing Material: PBT, PA66, PA46, High Temp Nylon UL94V-0, Black and Grey Color
 Contact Material: Phosphor Bronze 0.46mm, Round PIN
 Plating: Gold Plating over Nickel
- Electrical:**
 Voltage Rating: 125 V AC RMS
 Current Rating: 1.5 Amp
 Contact Resistance: 30mΩ Max.
 Insulation Resistance: 500MΩ Min. @ 500 VDC
 Dielectric Withstanding Resistance: 1000 VAC RMS 60Hz, 1 Min.
- Mechanical:**
 Durability : 750 Cycles Min.
 PCB Retention Force: 10 LBS Min.
- Environmental:**
 Storage Temperature : -40°C to +85°C
 Operation Temperature : -40°C to +85°C

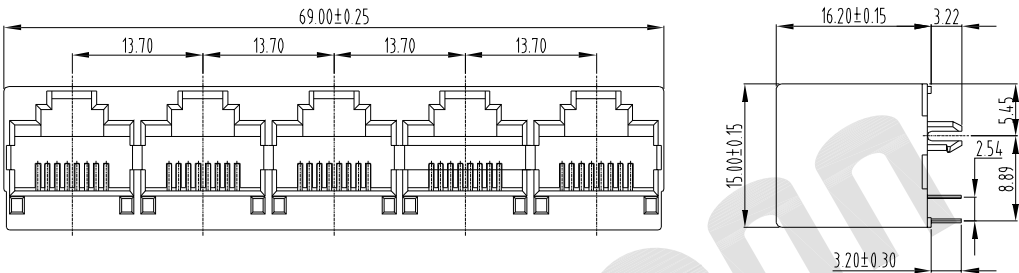

PCB LAYOUT/TOP VIEW

MJBB - 8 8 X X X X X X

Shield								Gold plating
0 - w/o Shield	No. of Ports						Housing Color	1 - G/Fμ"
1 - w/shield	1 - 1x1	Peg					1 - Black	2 - 3μ"
	2 - 1x2	0 - w/o peg				Insulator Material	2 - Grey	3 - 6μ"
	4 - 1x4	1 - Front peg 3.05				1 - PBT	3 - Others	4 - 15μ"
	5 - 1x5	2 - Front peg 3.68				2 - PA66		5 - 30μ"
	6 - 1x6	3 - Back peg 3.05				3 - PA46		6 - 50μ"
	8 - 1x8							

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION	TITLE
X.	±0.60	X.	±5°	mm	Top Entry Multi Port Modular Jack
.X	±0.38	.X	±3°	mm	Unshielded 1X5 RJ45
.XX	±0.25	.XX	±2°	A4	
DRAWING TYPE				CUSTOMER	
SCALE		1:1	SHEET	1 OF 1	
DRAWING NO.		MJBB - 88XXXXXX			

WAYCONN CO.,LTD