


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 03/24/16'	~	

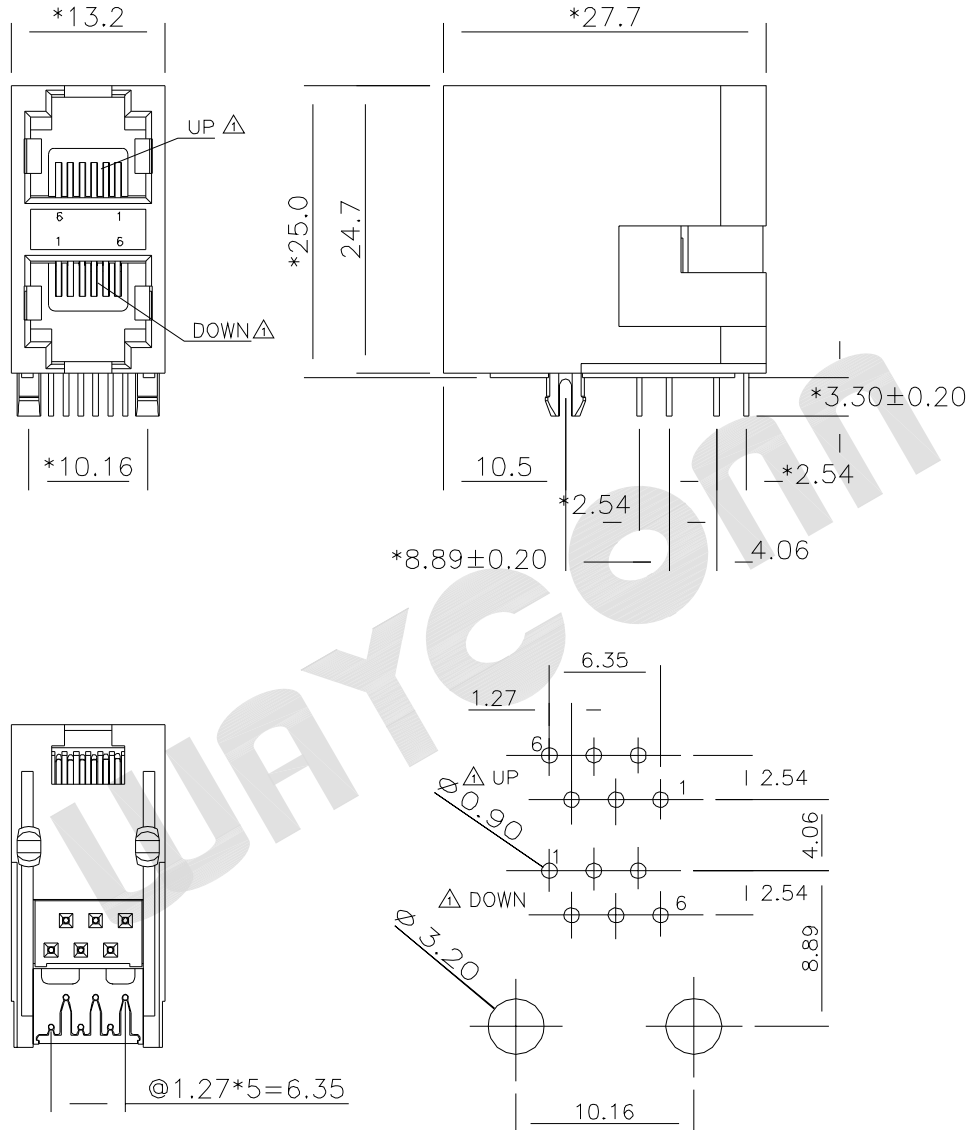

**PN#:** MJID-6601XXX

**DESC:** Stacked 2X1 RJ11 Connector, 6PIN, Unshielded

**Material:**

Housing Material: PBT, PA66, PA46, High Temp Nylon UL94V-0, Black and Grey Color

Contact Material: Phosphor Bronze 0.46mm, Round PIN

Plating: Gold Plating over Nickel

**Electrical:**

Voltage Rating: 125 V AC RMS

Current Rating: 1.5 Amp

Contact Resistance: 30mΩ Max.

Insulation Resistance: 500MΩ Min. @ 500 VDC

Dielectric Withstanding Resistance: 1000 VAC RMS 60Hz, 1 Min.

**Mechanical:**

Durability : 750 Cycles Min.

PCB Retention Force: 10 LBS Min.

**Environmental:**

Storage Temperature : -40°C to +85°C

Operation Temperature: -40°C to +85°C

MJID - 6X X X X X X

Positions Loaded	No. of Ports	Insulator Material	Gold Plating
2,4,6 Shield			1 - G/Fμ"
0 - w/o Shield	1 - 2x1	1 - PBT	2 - 3μ"
1 - Shield w/o EMI	2 - 2x2	2 - PA66	3 - 6μ"
2 - Shield w/ EMI	3 - 2x3	3 - PA46	4 - 15μ"
	4 - 2x4		5 - 30μ"
	5 - 2x5		6 - 50μ"
	6 - 2x6		
	8 - 2x8		

Back Peg  
0 - w/o Back peg  
1 - 1 Back peg  
2 - 2 Back peg  
3 - 3 Back peg

PC BOARD LAYOUT T=1.60MM  
COMPONENT SIDE SHOWN

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°

PROJECTION	TITLE
mm	Stacked 2X1 RJ11 Connector, 6PIN, Unshielded
SHEET SIZE	A4
SERIES	MJID SERIES

DRAWING TYPE	CUSTOMER
SCALE	1:1 SHEET 1 OF 1
DRAWING NO.	MJID - 6XXXXXX

**WAYCONN CO.,LTD**