




REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	YCH 02/12/14'	~	

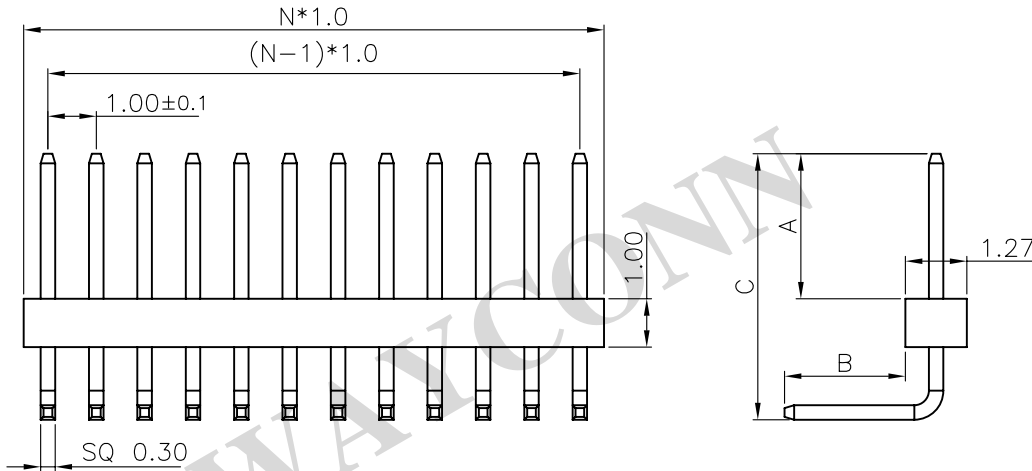

1. MATERIAL
  - 1.1 INSULATOR: THERMOPLASTIC (UL 94V-0).
  - 1.2 CONTACT MATERIAL: COPPER ALLOY.
2. SPECIFICATION
  - 2.1 CURRENT RATING: 1.0 Amp.
  - 2.2 INSULATION RESISTANCE: 500mΩ Min.
  - 2.3 DIELECTRIC WITHSTANDING: 600VAC.
  - 2.4 CONTACT RESISTANCE: 20mΩ Max.
  - 2.5 OPERATING TEMPERATURE: -40°C TO +105°C.
3. PLASTIC WITHSTAND TEMP
  - 3.1 MAX PROCESSING TEMP:
    - 180°C FOR 30-60 SEC; (200°C FOR 5-10 SEC.) - PBT
    - 230°C FOR 30-60 SEC; (260°C FOR 5-10 SEC.) - PA6T

**PH 100 - XXX - X X X GX**

<b>Gender</b> P=Pin Header F=Female Header	<b>Plating (Standard: G0)</b> G0: Gold Flash G2: 1U" Gold G3: 3U" Gold G4: 5U" Gold G5: 10U" Gold G6: 15U" Gold SN: Tin
<b>Pitch</b> 0.80=080 1.00=100 1.27=127 2.00=200 2.54=254	<b>Packing Style</b> 1. Loose in Bag 2. Tape & Reel 3. Tube
<b>No. of PINS</b> 1 x 01 ~ 1 x 40 PINS 2 x 01 ~ 2 x 40 PINS 3 x 01 ~ 3 x 40 PINS	<b>Insulator Material</b> 1: PBT 2: PA6T 3: PA9T 4: LCP
<b>Connector Type</b> S=Straight R=Right Angle M=SMT	

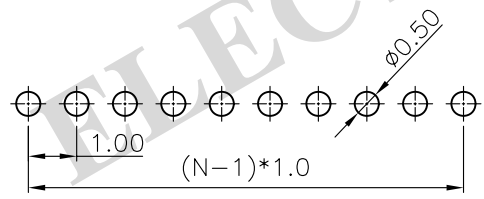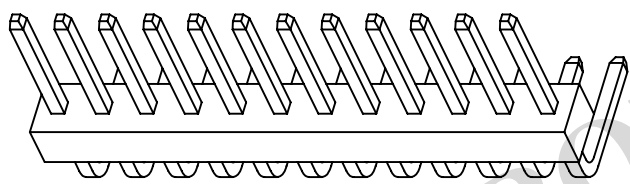

RECOMMEND PCB LAYOUT(TOLERANCE=±0.05)

PRODUCT TITLE:		1.00mm Pitch Pin Header, Thru-Hole, R/A, Single Row		
UNLESS OTHERWISE SPECIFIED TOLERANCES	SCALE: 1/1	UNIT: mm		PH100-1XX-RXXG0-04
	SIZE: A3	PAGE: 1 OF 1		
DECIMALS:	ANGLES:	<b>WAYCONN ELECTRONICS</b>		
X : ±0.5	X : ±6°			
X.X : ±0.3	X.X : ±3°			
X.XX : ±0.2	X.XX : ±2°			