

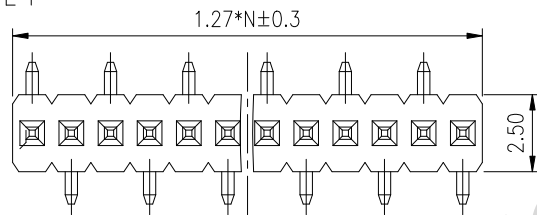




TYPE 1

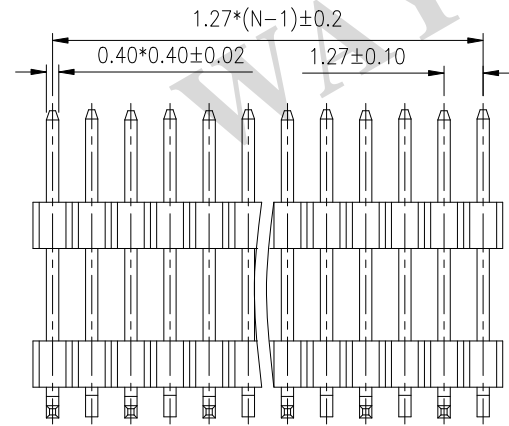

TYPE 2

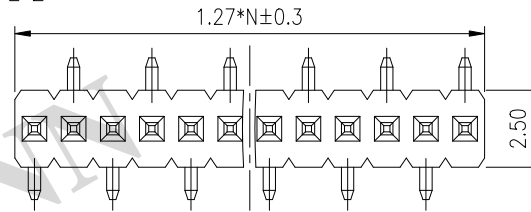

N:No.OF CONTACTS

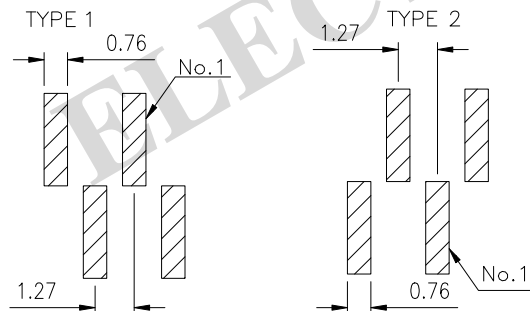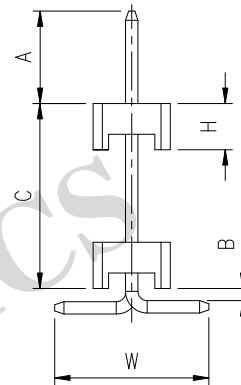

RECOMMEND PCB LAYOUT(TOLERANCE=±0.05)

1. MATERIAL

- 1.1 INSULATOR: THERMOPLASTIC (UL 94V-0).
- 1.2 CONTACT MATERIAL: COPPER ALLOY.

2. SPECIFICATION

- 2.1 CURRENT RATING: 1.0 Amp.
- 2.2 INSULATION RESISTANCE: 1000mΩ Min.
- 2.3 DIELECTRIC WITHSTANDING: 300VAC.
- 2.4 CONTACT RESISTENCE: 50mΩ Max.
- 2.5 OPERATING TEMPERATURE: -40°C TO +105°C.

3. PLASTIC WITHSTAND TEMP

- 3.1 MAX PROCESSING TEMP:
180°C FOR 30-60 SEC; (200°C FOR 5-10 SEC.) - PBT
230°C FOR 30-60 SEC; (260°C FOR 5-10 SEC.) - PA6T

PH 127 - XXX - XXX GX

Gender

P=Pin Header
F=Female Header

Pitch

0.80=080
1.00=100
1.27=127
2.00=200
2.54=254

No. of PINS

1 x 01 ~ 1 x 40 PINS
2 x 01 ~ 2 x 40 PINS
3 x 01 ~ 3 x 40 PINS

Connector Type

S=Straight
R=Right Angle
M=SMT

Plating (Standard: G0)

G0: Gold Flash
G2: 1U" Gold
G3: 3U" Gold
G4: 5U" Gold
G5: 10U" Gold
G6: 15U" Gold
SN: Tin

Packing Style

1. Loose in Bag
2. Tape & Reel
3. Tube

Insulator Material

1: PBT
2: PA6T
3: PA9T
4: LCP

PRODUCT TITLE:	1.27mm SMT Pin Header, Straight, Elevated		
UNLESS OTHERWISE SPECIFIED TOLERANCES	SCALE: 1/1	UNIT: mm	
	SIZE: A3	PAGE: 1 OF 1	
DECIMALS: X :±0.5 X.X :±0.3 X.XX :±0.2 ANGLES: X :±6° X.X :±3° X.XX :±2°	WAYCONN ELECTRONICS		