



DETAIL A  
1:1

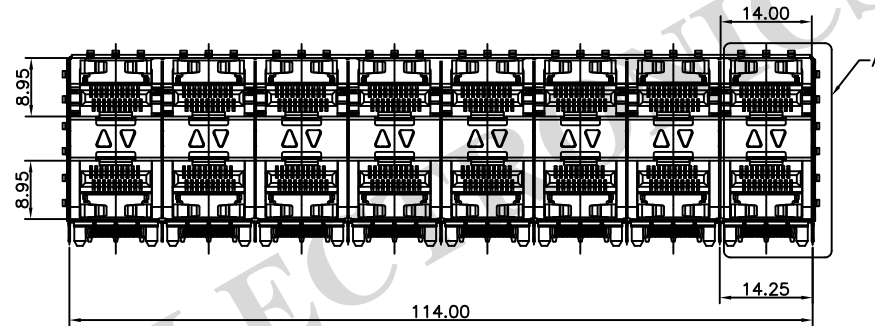

**MATERIAL:**  
**CAGE:**  
 NICKEL SILVER, THICKNESS 0.25MM  
**CONNECTOR:**  
 PLASTIC HOUSING: HIGH TEMPERATURE LCP, UL94 V-0  
 SPRING: STAINLESS STEEL, THICKNESS 0.20MM  
 CONTACTS: PHOSPHOR BRONZE, THICKNESS 0.20MM  
 PLATING: 15u" MIN. GOLD ON MATING AREA;  
 150u" MIN. MATE TIN ON SOLDER TAILS.  
**PACKING:** TRAY/CARTON  
**TEMPERATURE RANGE:** -40°C ~ 85°C


PRODUCT TITLE:		SFP Cage & Connector 2X8, PRESS-FIT, with 2 Light Pipes		
UNLESS OTHERWISE SPECIFIED TOLERANCES	SCALE: 1/1	UNIT: mm		SC0-N28PL2-1
	SIZE: A3	PAGE: 1 OF 1	RAV.A01	
X :±0.2	X :±1°	<b>WAYCONN ELECTRONICS</b>		
.XX :±0.15	.XX :±5°			
.XXX :±0.1				

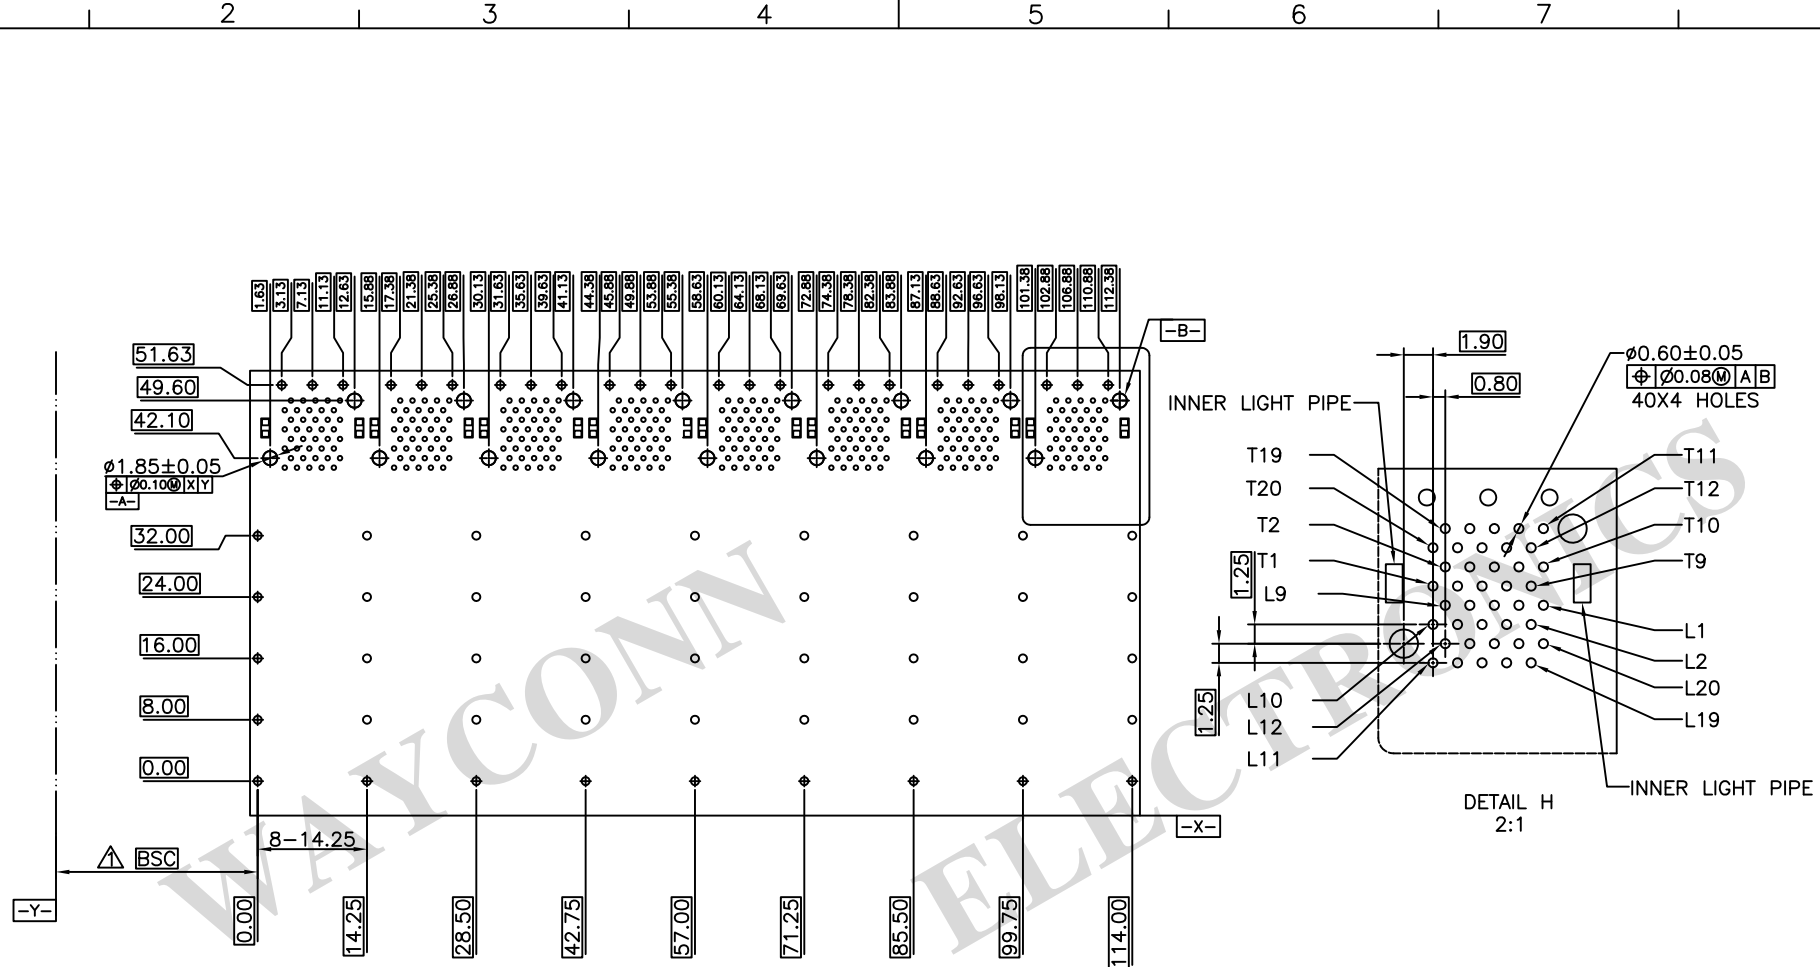

**ECOMMENDED PCB CONFIGURATION**

- NOTES:
1. DATUM AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER.
  2. 1.05 mm DIAMETER HOLES ARE CHASSIS GROUND (18 HOLES).

PRODUCT TITLE:		SFP Cage & Connector 2X8, PRESS-FIT, with 2 Light Pipes		
UNLESS OTHERWISE SPECIFIED TOLERANCES	SCALE: 1/1	UNIT: mm		SC0-N28PL2-1
	SIZE: A3	PAGE: 1 OF 1	RAV.A01	
X :±0.2	X :±1°	<b>WAYCONN ELECTRONICS</b>		
.XX :±0.15	.XX :±5°			
.XXX :±0.1				

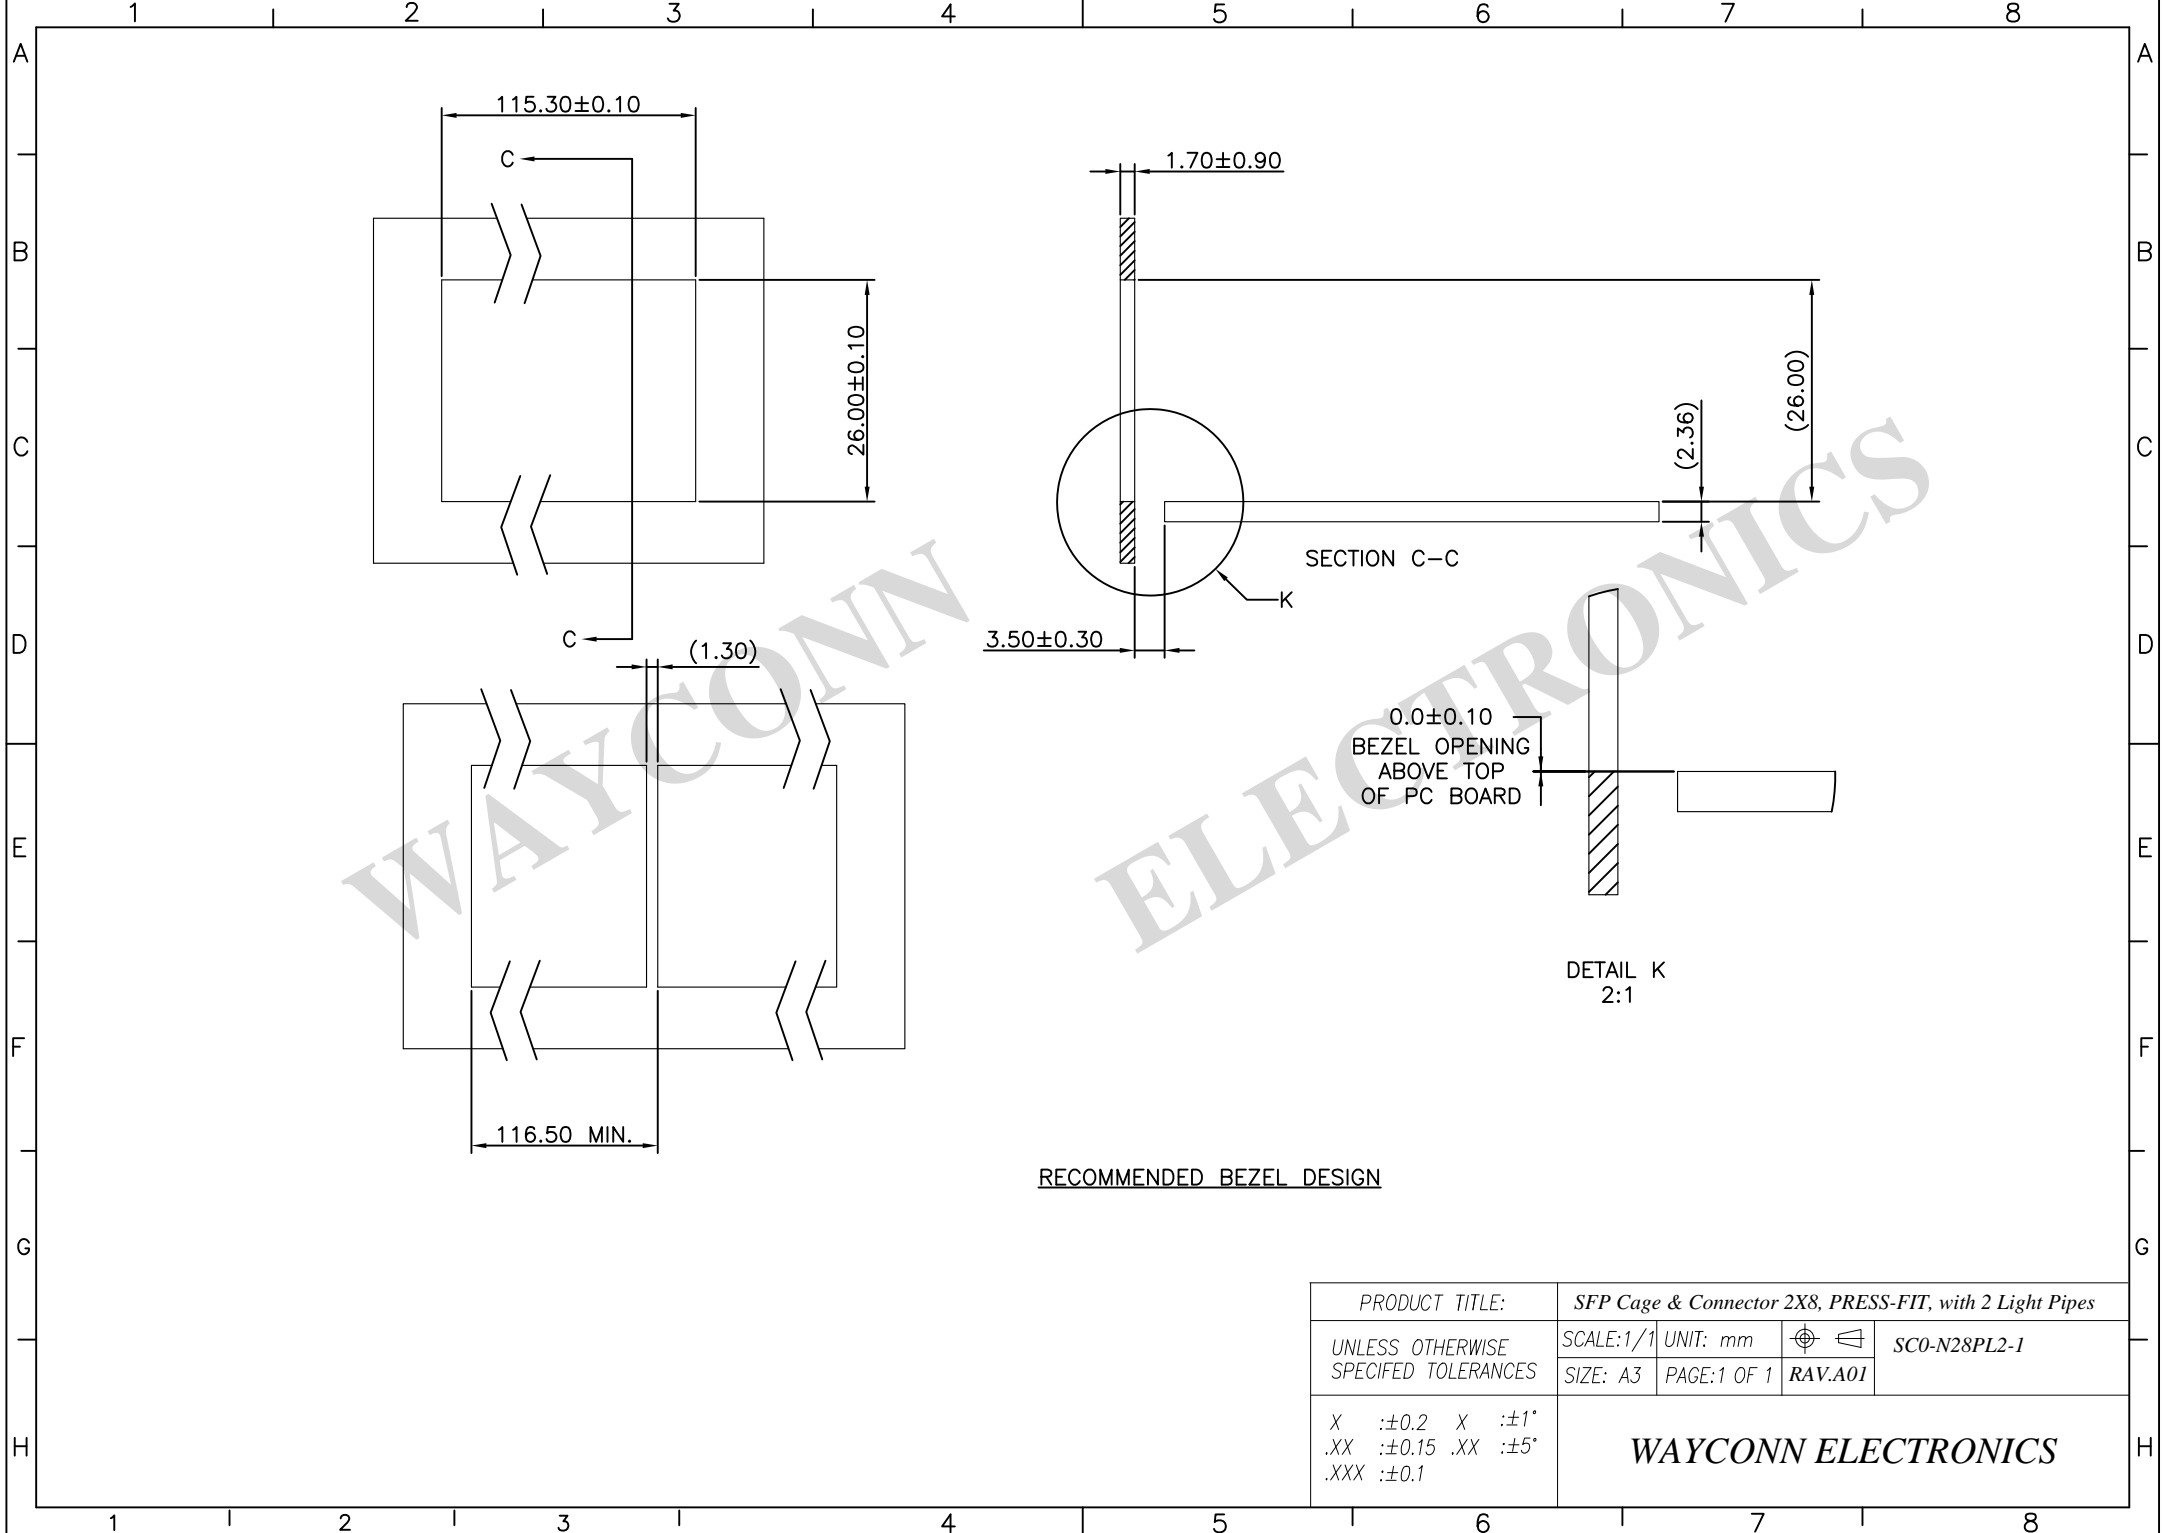

PRODUCT TITLE:		<i>SFP Cage &amp; Connector 2X8, PRESS-FIT, with 2 Light Pipes</i>		
UNLESS OTHERWISE SPECIFIED TOLERANCES	SCALE: 1/1	UNIT: mm		SC0-N28PL2-1
	SIZE: A3	PAGE: 1 OF 1	RAV.A01	
X	:±0.2	X	:±1°	<b>WAYCONN ELECTRONICS</b>
.XX	:±0.15	.XX	:±5°	
.XXX	:±0.1			