

**NOTE:**



**1. DESCRIPTION**

- 01 SFP TOP CAGE 1PCS COPPER ALLOY T=0.25
- 02 SFP BOTTOM CAGE 1PCS COPPER ALLOY T=0.25
- 03 SFP MID CAGE 5PCS COPPER ALLOY T=0.25
- 04 SFP BACK CAGE 1PCS COPPER ALLOY T=0.25
- 05 SFP KICKOUT SPRING 6PCS SUS304 5=0.20

**2. TEMPERATURE**

OPERATION: -40°C TO +85°C  
 STORAGE: -55°C TO +105°C

**3. INSERTION AND EXTRACTION FORCE: 40N MAX & 11.50 MAX**

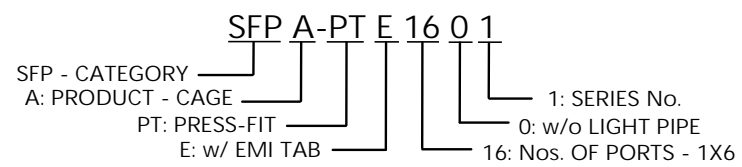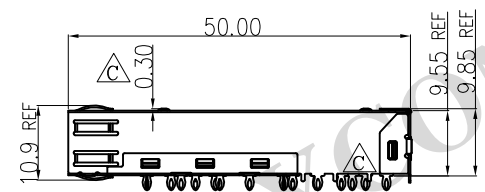

GRENERAL TOLERANCE		PROJECTION		TITLE	SFP CAGE 1X6	
.X	±0.20	UNITS	mm		PRESS-FIT W/ EMI TABS	
.XX	±0.15	SHEET SIZE	A4	P/N:	SFPA-PTE1601	
.XXX	±0.10	<b>WAYCONN ELECTRONICS</b>				
ANGLES ±0.5						
SCALE	1:1					
SHEET	1 OF 1					