
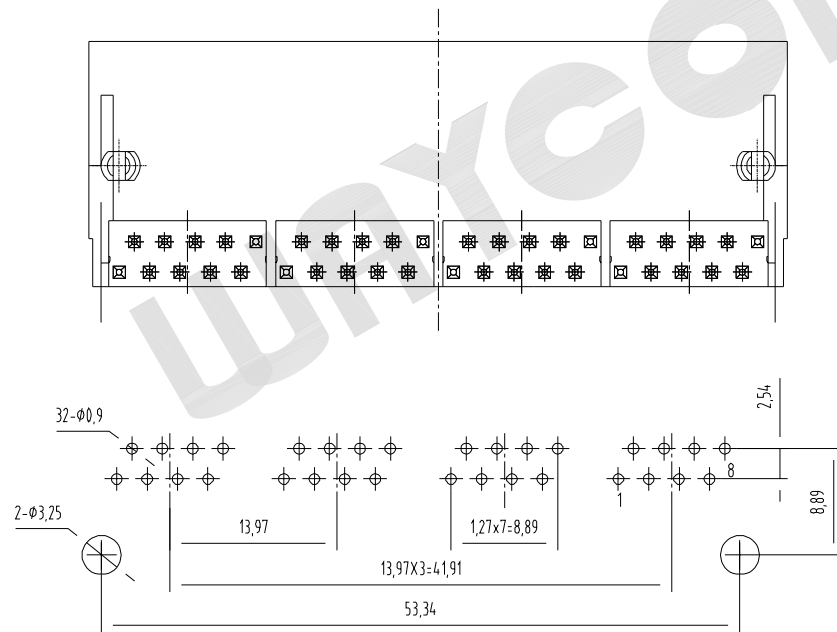


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 03/24/16'	~	

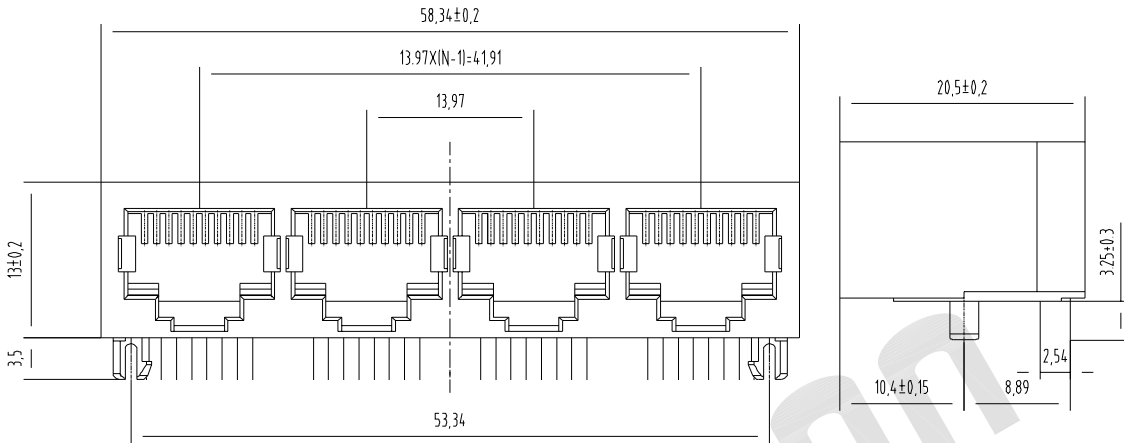

PN#: MJIA-1080400XX
DESC: 1X4 Ganged RJ45 Connectors, 90° Angle, 10P8C, Unshielded

Material:
 Housing Material: PBT, PA66, PA46, High Temp Nylon UL94V-0, Black and Grey Color
 Contact Material: Phosphor Bronze 0.46mm, Round PIN
 Shield Material: Copper, Nickel Plated
 Plating: Gold Plating over Nickel

Electrical:
 Voltage Rating: 125 V AC RMS
 Current Rating: 1.5 Amp
 Contact Resistance: 30mΩ Max.
 Insulation Resistance: 500MΩ Min. @ 500 VDC
 Dielectric Withstanding Resistance: 1000 VAC RMS 60Hz, 1 Min.

Mechanical:
 Durability : 750 Cycles Min.
 PCB Retention Force: 10 LBS Min.

Environmental:
 Storage Temperature : -40°C to +85°C
 Operation Temperature: -40°C to +85°C

MJIA - 108 X X X X X X

Shield	No. of Ports	Insulator Material	Gold Plating
0 - w/o Shield	1 - 1x1 Peg	1 - PBT	1 - G/Fμ"
1 - Shield w/o EMI	2 - 1x2	2 - PA66	2 - 3μ"
2 - Shield w/ EMI	3 - 1x3	3 - PA46	3 - 6μ"
	0 - w/o Back peg		4 - 15μ"
	1 - Front peg 3.05		5 - 30μ"
	2 - Front peg 3.68		6 - 50μ"
	3 - Front peg 4.57		
	4 - Back peg 3.05		
	8 - 1x8		

PC Board Layout
 Component Side Shown

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°

PROJECTION	TITLE
mm	1X4 Ganged RJ45 Connectors, 90° Angle, 10P8C, Unshielded
SHEET SIZE	A4
SERIES	MJIA SERIES

DRAWING TYPE	CUSTOMER
SCALE	1:1 SHEET 1 OF 1
DRAWING NO.	MJIA - 108XXXXXX

WAYCONN CO.,LTD