



TYPE 1

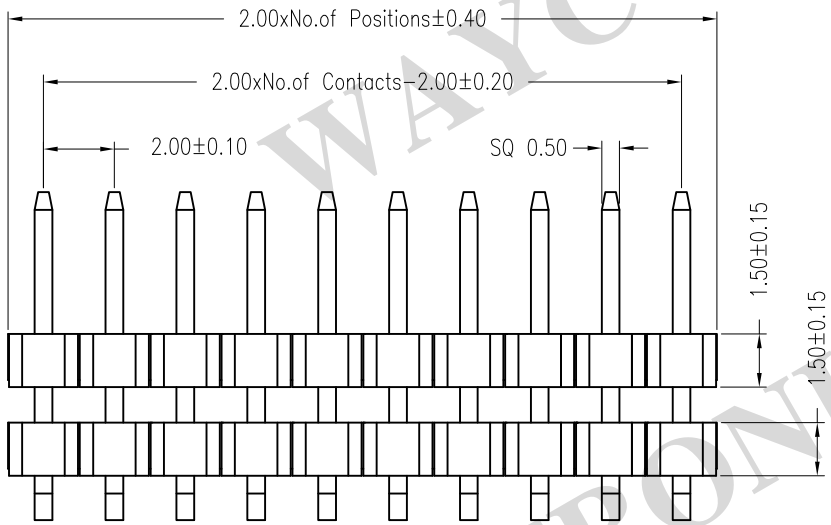

TYPE 2

**1. MATERIAL**

- 1.1 INSULATOR: THERMOPLASTIC (UL 94V-0).
- 1.2 CONTACT MATERIAL: COPPER ALLOY.

**2. SPECIFICATION**

- 2.1 CURRENT RATING: 1.5 Amp.
- 2.2 INSULATION RESISTANCE: 1000mΩ Min.
- 2.3 DIELECTRIC WITHSTANDING: 600VAC.
- 2.4 CONTACT RESISTENCE: 20mΩ Max.
- 2.5 OPERATING TEMPERATURE: -40°C TO +105°C.


**3. PLASTIC WITHSTAND TEMP**

- 3.1 MAX PROCESSING TEMP:  
 180°C FOR 30-60 SEC; (200°C FOR 5-10 SEC.) - PBT  
 230°C FOR 30-60 SEC; (260°C FOR 5-10 SEC.) - PA6T

**PH 200 - XXX - XXX GX**

<b>Gender</b> P=Pin Header F=Female Header	<b>Plating Standard</b> G0: Gold Flash G2: 1U" Gold G3: 3U" Gold G4: 5U" Gold G5: 10U" Gold G6: 15U" Gold Gold SN: Tin
<b>Pitch</b> 0.80=080 1.00=100 1.27=127 2.00=200 2.54=254	<b>Packing Style</b> 1. Loose in Bag 2. Tape & Reel 3. Tube
<b>No. of PINS</b> 1 x 01 ~ 1 x 40 PINS 2 x 01 ~ 2 x 40 PINS 3 x 01 ~ 3 x 40 PINS	<b>Insulator Material</b> 1: PBT 2: PA6T 3: PA9T 4: LCP
<b>Connector Type</b> S=Straight R=Right Angle M=SMT	

Recommended P.C.B Layout (Top Side)  
(PCB BOARD TOLERANCE±0.05)

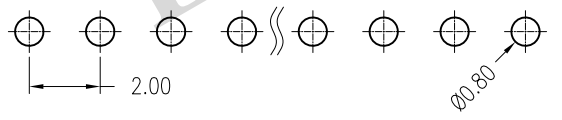

PRODUCT TITLE:	2mm Pin Header, Right Angle, Stack Type		
UNLESS OTHERWISE SPECIFIED TOLERANCES	SCALE: 1/1	UNIT: mm	RAV.AOI
	SIZE: A3	PAGE: 1 OF 1	
DECIMALS:	ANGLES:	<b>WAYCONN ELECTRONICS</b>	
X : ±0.5	X : ±6°		
X.X : ±0.3	X.X : ±3°		
X.XX : ±0.2	X.XX : ±2°		